

FORM PTO-1390
(REV. 12-97)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

STUR-11

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

09/142712

INTERNATIONAL APPLICATION NO.

PCT/EP97/01254

INTERNATIONAL FILING DATE

12 March 1997

PRIORITY DATE CLAIMED

12 March 1996

TITLE OF INVENTION

METHOD OF ROTTING COMPOSTABLE MATERIAL

APPLICANT(S) FOR DO/EO/US

Heinz Loosen

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:


1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made, however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). (unsigned)
10. ☐ A translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A **FIRST** preliminary amendment.
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☐ Other items or information.

09/142712

300 Rec'd PCT/PTO 10 SEP 1998

U.S. APPLICATION NO (if known, see 37 CFR 1.5)		INTERNATIONAL APPLICATION NO PCT/EP97/01254		ATTORNEY'S DOCKET NUMBER STUR-11	
17. <input type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)): Search Report has been prepared by the EPO or JPO \$930.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) \$720.00 No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) \$790.00 Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$1070.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) \$98.00 ENTER APPROPRIATE BASIC FEE AMOUNT =				CALCULATIONS PTO USE ONLY	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$	
Total claims	- 20 =		x \$22.00	\$	
Independent claims	- 3 =		x \$82.00	\$	
<input checked="" type="checkbox"/> MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$270.00	\$	
TOTAL OF ABOVE CALCULATIONS =				\$	
Reduction of 1/2 for filing by small entity, if applicable. A Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28)				\$	
SUBTOTAL =				\$	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$	
TOTAL NATIONAL FEE =				\$	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +				\$	
TOTAL FEES ENCLOSED =				\$	
				Amount to be refunded:	\$
				charged:	\$
a. <input type="checkbox"/> A check in the amount of \$ _____ to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed c. <input type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No _____ A duplicate copy of this sheet is enclosed.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO: Scott R. Foster Pandiscio & Pandiscio 470 Totten Pond Road Waltham, MA 02451-1914 Tel. (781) 290-0060					
				 SIGNATURE <hr/> Scott R. Foster NAME <hr/> 20,570 REGISTRATION NUMBER	

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: Heinz Loosen
International Application No.: PCT/EP97/01254
International Filing Date: 03/12/97
U.S. Serial No.: 09/142,712
U.S. Filing Date: 09/10/98
Title: METHOD OF ROTTING COMPOSTABLE
MATERIAL
Group Art Unit: Unknown
Examiner: Unknown
Attorney's Docket No.: STUR-11

BOX PCT

Assistant Commissioner For Patents
Washington, D.C. 20231

Sir:

PRELIMINARY AMENDMENT

Please amend the above-identified application as follows:

Claim 4, line 1, delete "2 or claim";

Claim 8, line 1, change "claims" to -- claim -- and delete "through 7";

Claim 9, line 1, delete "claims 4 through 8" and insert -- claim 7 --;

Claim 10, line 1, change "claims" to -- claim -- and delete "through 9";

Claim 12, line 1, delete "or 11";

Claim 13, line 1, change "claims" to -- claim -- and delete "through 12";

line 2, delete "the" (second and third occurrences), and before
"sieve" insert -- a --;

Claim 15, line 1, change "claims" to -- claim -- and delete "through 14";

Claim 16, line 1, delete "claim 1 through 15" and insert -- claim 4 --;

Claim 22, line 1, change "claims" to -- claim -- and delete "through 21";

Claim 23, line 1, delete "claims 1 through 22" and insert -- claim 10 --;

Claim 25, line 1, delete "1-24" and insert -- 9 --;

STUR-11

Claim 26, line 1, delete "-25";


Claim 27, line 1, delete "-26"; and

Claim 28, line 1, delete "-26".

REMARKS

The above amendments are entered to eliminate multiple dependencies.

Respectfully submitted,

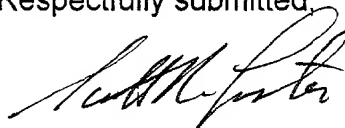

Scott R. Foster
Registration No. 20,570
Pandiscio & Pandiscio
470 Totten Pond Road
Waltham, MA 02451-1914
Tel. (781) 290-0060

baw/srf#2
stur11.rsp


"EXPRESS MAIL" MAILING LABEL NUMBER EJ884693549JS

DATE OF DEPOSIT 8/6/99

I HEREBY CERTIFY THAT THIS PAPER OR FEE IS BEING DEPOSITED
WITH THE UNITED STATES POSTAL SERVICE "EXPRESS MAIL POST
OFFICE TO ADDRESSEE" SERVICE UNDER 37 CFR 1.10 ON THE
DATE INDICATED ABOVE AND IS ADDRESSED TO THE ASSISTANT
COMMISSIONER FOR PATENTS, WASHINGTON, D.C. 20231.

Scott R. Foster

(PERSON MAILING)

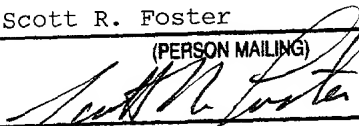

(SIGNATURE)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: Heinz Loosen
 International Application No.: PCT/EP97/01254
 International Filing Date: 03/12/97
 U.S. Serial No.: 09/142,712
 U.S. Filing Date: 09/10/98
 Title: METHOD OF ROTTING COMPOSTABLE
 MATERIAL
 Group Art Unit: Unknown
 Examiner: Unknown
 Attorney's Docket No.: STUR-11

"EXPRESS MAIL" MAILING LABEL NUMBER EE543306445USDATE OF DEPOSIT 10/16/99

I HEREBY CERTIFY THAT THIS PAPER OR FEE IS BEING DEPOSITED
 WITH THE UNITED STATES POSTAL SERVICE "EXPRESS MAIL POST
 OFFICE TO ADDRESSEE" SERVICE UNDER 37 CFR 1.10 ON THE
 DATE INDICATED ABOVE AND IS ADDRESSED TO THE ASSISTANT
 COMMISSIONER FOR PATENTS, WASHINGTON, D.C. 20231.

BOX PCT
 Assistant Commissioner For Patents
 Washington, D.C. 20231

Scott R. Foster

Sir:

(PERSON MAILING)

SUPPLEMENTAL PRELIMINARY AMENDMENT

(SIGNATURE)

IN THE CLAIMS:


Claim 29, line 1, delete "- 26".

REMARKS

In reviewing an English translation of the PCT application, it was noted that
 claim 29, which appears on a separate page of the translation (page 23), had not
 been amended in the previous Preliminary Amendment.

If any fees are required to be paid in connection with this amendment, please
 charge the same to Deposit Account No. 16-0221.

Respectfully submitted,

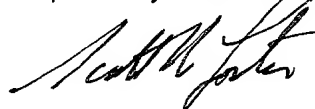

Scott R. Foster
 Registration No. 20,570
 Pandiscio & Pandiscio
 470 Totten Pond Road
 Waltham, MA 02451-1914
 Tel. (781) 290-0060

baw/srf#2
 stur11.pre

STUR-11

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: Heinz Loosen
Title: METHOD OF ROTTING COMPOSTABLE MATERIAL
Attorney's Docket No.: STUR-11

Assistant Commissioner For Patents
Washington, D.C. 20231

VERIFIED STATEMENT CLAIMING SMALL BUSINESS ENTITY
STATUS - INDEPENDENT INVENTOR

I, Heinz Loosen, a citizen of Germany residing at Verbindungsstrasse 15, D-40764 Langenfeld, Germany, as the inventor named in the above-identified application, hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for the purposes of paying reduced fees under Title 35, United States Code, Sections 41(a) and (b), to the United States Patent and Trademark Office with regard to the invention described and claimed in the above-identified U.S. Patent Application; that I have not assigned, granted, conveyed or licensed, nor based upon information and belief am I under any obligation under contract or law to assign, grant, license or convey any rights in said invention to any person who could not likewise be classified as an independent inventor if that person had made the invention, or to any concern which would not qualify as a small business concern or a nonprofit organization as defined in 37 CFR 1.9(d) and (e), respectively.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18, United States Code, Section 1001, and that such willful false statements may jeopardize the validity of the above-identified application, any patent issuing thereon, or any patent to which this verified statement is directed.

Date: 122.9. 1998

Heinz Loosen
Heinz Loosen

RD4\STUR11.ENT

STUR-11

WO 97/33845

PCT/EP97/01254

A Method of Rotting Compostable Material¹

The present invention relates to a method according to the overriding concept of claim 1.

Such a method should be generally well known. In such methods, the materials to be composted are first reduced in size, and, in a quasi-stationary process, conducted to a mixing drum, where the materials to be rotted are to be digested microbially, in order, then, to store the partially digested materials in ricks².

Accordingly, the present method is distinguished from the known methods of household composting by virtue of the fact that the method is undertaken, in a purposeful way, in a quasi-stationary throughput process in combination with the characteristics of prior shredding and preliminary rotting in a mixing drum.

The prior decaying in an enclosed mixing drum is undertaken, to good advantage, at temperatures that clearly exceed the ambient temperature. This fosters the speed of the preliminary decaying reaction.

And yet, it has been shown that with the known method, the decaying times are still relatively long.

Therefore, it is the task of the invention to extend the known method in such a way that the decaying times are shortened by measures of process technology.

The invention performs this task with the characteristics of claim 1.

The reduced decaying times result from the better mixing through of the interim products, and from the anaerobic pre-treatment and subsequent treatment, respectively. In a special extension, a partial flow of pre-rotted material is, in addition, subjected to subsequent anaerobic treatment before the partial flow, which has undergone subsequent treatment of this type, is led, once more, to a stage in the method. It is possible to affect the nitrogen content by means of anaerobic denitrification, before the stage, and/or after it.

The invention results in the advantage that the micro-organisms that developed in the course of the process are removed at the end of a pre-determined processing stage in each case,

¹ Translator's Note: "CONFIRMATION COPY" appears at the bottom of the page.

² Translator's Note: Also means silos, stacks.

and are led back to the beginning of the processing stage, in question, so that by these means, the micro-organisms that are particularly active at all times, are available, even at the beginning of each and every stage in the process, to digest the material to be composted with corresponding speed.

This advantage is achieved by virtue of the fact that the material, at the beginning of each and every processing stage, is brought into contact with the material that is available at the end of this processing stage and is thoroughly mixed in a substantially homogeneous manner.

In this way, the microorganisms that are led back can be used once more to digest the initial material of the process stage.

An exponential proliferation of the microorganisms in question may be expected accordingly, from which, once again, an accelerated decaying process results.

In the process, it is assumed that the individual growth rate of the microorganisms also depends upon the nutritional offerings. The nutritional offerings should be greatest in the area of the initial material of a processing stage because the micro-organisms that are responsible for this processing stage have not yet been able to undertake any intensive breakdown of the nutritive material there.

In the process, especially at the beginning of the processing through-put, the entire product can be led back in order to achieve an accelerated increase of the rate of processing, up to the highest possible speed.

If one considers, furthermore, that certain processing stages cause certain stages of decay, these stages of decay are achieved more quickly by the cascade-like return of the material in each case.

Accordingly, within a shorter processing period as well, it is possible to count on an increased proportion of process-specific intermediate products.

The result of this, for the processing stage that follows, in each case, is an increased saturation of its end products within a correspondingly shorter span of time.

And yet, here, too, once again, the material can be led back in order to achieve an exponential rate of reaction here as well.

In the process, particular attention is paid to leading the interim products back at the end of the mixing drum because in the mixing drum, the bio-chemical reactive processes proceed in many instances to a high degree and in an intensive manner.

The processes that occur within the mixing drum are exothermal so that as the material is led back, the processing temperature at the beginning of the mixing drum can be increased accordingly.

The result of this, once again, is a reduction of the decaying times in the mixing drum and of any subsequent stages that might follow.

In a special extension, a subsequent aerobic treatment is provided, at least in part, to a partial flow behind the mixing drum. To do this, the micro-organisms of the pre-decayed material undergo as thorough a mixing as possible in a reactor vessel while air is introduced, in order to prepare the micro-organisms that are required for the decay, by means of process technology, for their use in a preceding stage of the process.

To do this, it is suggested that the thorough mixing be accomplished in a self-contained loop of flow that should be enclosed within the reactor vessel, one that is, preferably, vertical. In addition, the subsequent aerobic treatment can occur as physically prepared water, preferably, is introduced. To this end, it is suggested that the water be prepared in a manner that is friendly to microbes. This will be dealt with in detail in what follows. It proved to be extraordinarily effective if the partial flow for the subsequent aerobic treatment is separated, initially, into a flow of solids, and a cloudy water flow. In this case, it must be assumed that the micro-organisms that are to undergo preparation are swimming, for the most part, in the flow of cloudy water, which can, from the standpoint of process technology, be subjected to subsequent aerobic treatment by relatively simple means.

What is at stake, accordingly, is a sub-case of pre-rotted material of the subsequent treatment per se, in which, as a result of the separation of the microbially saturated cloudy water, a further specification of this treatment stage occurs.

Advantageous extensions of the invention result from the subsidiary claims.

Particular significance is attached to the characteristics of claim 16 in the process.

As a result of these measures, indeed, on the one hand, without any further ado, fresh water, untreated water, or wastewater can be used to accelerate the process; on the other hand, an embodiment example for an apparatus is given, by means of which the tapwater is affected only for the requisite processing duration, accordingly.

In what follows, the invention is elucidated in greater detail by virtue of embodiment examples.

Fig. 1 shows, schematically, a facility for implementing the process according to this invention,

Fig. 2 shows a device for processing water in a manner that is friendly to microbes, in longitudinal section.

Fig. 3 shows a view according to Fig. 2, along the line III-III,

Fig. 4 shows a mixing blade for the rotating drum, and

Fig. 5 shows a portion of the facility for the subsequent aerobic treatment of a pre-rotted partial flow.

Fig. 6 shows the total principle of a facility with additional subsequent denitrification and a bio-stage reactor according to Fig. 5.

Figs. 7a, b show embodiment examples for suitable mixing drums,

Fig. 8 shows additional embodiment examples for processing water.³

To the extent that nothing to the contrary is said in what follows, the following description applies to all figures, in all cases.

A conceivable facility for implementing the process according to the present invention consists of a shredder, 1, in which the material to be composted is initially reduced in size to pieces of substantially uniform size.

After the material has been shredded, it can be conducted to the preliminary product mixer, 2, where, if necessary, aerobic or anaerobic preliminary products may be added to the mixture. For this purpose, the preliminary product mixer, 2, exhibits a mixing shaft, 3, that stands vertically, which is connected with mixing blades 4 that sit upon it so as to resist rotation. Due to a propulsion unit that is not depicted, the mixing shaft, 3, is set in rotary motion so as to thoroughly mix the freshly-shredded material with the preliminary products in as homogeneous a manner as possible.

From the preliminary product mixer, 2, following this processing stage, a partial flow of this material is branched off and led to the anaerobic denitrification container 5 via preliminary denitrification line 29. There, as the name implies, the partially branched off material of the preliminary product mixer, 2, is denitrified, to return it then, once again as a partial flow, to the preliminary products.

³Translator's Note: No Figures were included with the document.

In this way, following combination once again, a predetermined proportion of nitrogen is produced in the shredded material before it is placed into mixing drum 6.

Thus, even here, a partially digested compost material with a predetermined proportion of nitrogen may be expected, which is now processed further in mixing drum 6. In the case of Fig. 1, the mixing drum may be turned around an axis with a horizontal component. The thorough mixing is accomplished by means of mixing blades that sit rigidly on mixing drum 10. A mixing drum of this type will be referred to as a rotating drum in what follows. For mixing drums of other embodiments (see Figs. 7a, b) the following applies, accordingly, with the proviso that instead of the concept "rotating drum," the concept "mixing drum" will be used.

Rotating drum 6 is supported on stationary bearings, 7, and, by means of a suitable propulsion system, it is capable of turning, together with the material found within it, around the longitudinal axis, which lies horizontally.

The drum itself is embodied as a straight, hollow, cylindrical drum, and at both its ends, it is closed by means of covers. At input end 8, a central opening serves the continual inputting of the material to be composted, material which has been prepared with the pre-determined nitrogen content.

As a result of the central opening at input end 8, the material can be introduced, without interruption, into rotating drum 6, where it collects, practically uniformly, in the lower area of rotating drum 6. During rotation, the mixing blades, 10, which are rigidly connected to the wall of the rotating drum, 45 (see Fig. 4), constantly move through the collection of the material to be composted, which has collected in the lower area of the drum, and they assure, by way of the horizontal position of the drum, a quality that is as homogeneous as possible.

The microbiological-chemical reactions within rotating drum 6 assure a temperature there that is on the order of about 80°C.

A spray unit, which is fed by way of the water conditioning facility, 33, serves to assure the requisite moisture. This will be addressed later.

At the removal end, 9, of the drum, a cover may be applied, for example, which is perforated by one or more openings in the area of its outer edge. In the process, these perforations move again and again through the area in which the material to be composted collects and they scrape past it.

Due to the fact that the input of the material to be composted occurs practically continually, previously digested composting material will escape by way of the passing perforations on removal end 9 of rotating drum 6, material which is then conducted to the return conveyor 11.

To this end, the return conveyor, 11, is equipped with a spiral conveyor, 12, which conveys the material to be led back to the beginning of the "rotating drum" processing stage. There, the material that was removed at the end of the "rotating drum" processing stage is combined with the material from the preliminary product mixer, 2. In the process, the nutrients that are contained within the material from the preliminary product mixer, 2, are particularly greedily accepted by the microbes of the material that originates from the end of this processing stage because the terminal material is already nutrient-poor in this regard.

What happens in this way is that within the shortest period of time, the freshly-added material is digested, and can be transformed by the microbes.

In the process, the return spiral conveyor, 12, can be continually driven if the return conveyor 11 is seated on bearings in suitable fashion, so as to be capable of rotation relative to removal end, 9.

As a consequence of the elevated temperature within drum 6, provision can also be made for the heat contained within the material that has been taken out to be removed in a heat exchanger, 13, and for it to be conducted back into the process.

The air that is warmed up for this purpose can, on the one hand, be led back, by way of a thermal return line 15, to the input end, 8, of rotating drum 6; on the other hand, however, it is also possible to conduct this heat to a post-ventilator, 27, which then uses the warm air to keep the crude composter, 23, warm.

In the process, especially by means of the quantitative ratio of the air currents to the preliminary ventilator, 28, and to the post-ventilator, 27, it is possible to achieve a certain condition in terms of temperature. Therefore, an optimization of the ratio of the rotating drum temperature and the crude composting temperature is possible as well.

The temperature ratio is adjusted by way of the quantitative ratio of the air currents in the waste heat line 14 and in the thermal return line 15.

The partial flow, which is not removed at the end of rotating drum, 6, is then led to a coarse sieve, 16, which coarse sieve, 16, may be followed by a fine sieve, 17.

Furthermore, an additional partial flow can be removed at the end of the rotating drum 6 and be led to the preliminary product mixer 2.

This affords the advantage that even largely digested material is thoroughly mixed with the freshly shredded material to form a homogeneous blend. It holds true here, as well, that the microbes that are present at the end of the "rotating drum" processing stage proceed, in an extremely active manner, to break down the shredded material, which is still very rich in nutrients.

At the end of the course of sieves, 16, 17, material that has already been finely sifted is available.

The coarse pieces that are retained by the sieves can be led to a grinder, 18, where they are ground once more.

The ground material can then, by means of the grinder return line, 50, be introduced to good purpose into the process immediately behind the shredder, 1, once more, so that practically no residual substances of any kind remain from the process.

The sieve cascade, 16, 17 is topped by an anaerobe container. For this purpose, it is suggested that material that has already been partially digested and has been finely sifted be subjected to a sojourn period of between about three and thirty days, in order to activate the breakdown process.

An anaerobe material return line, 21, leads back from the anaerobe container, 19, in order to make it possible to conduct even the material of this processing stage to a preceding stage of the process once again. If necessary, the material, which has undergone prior anaerobic treatment, can be brought together with the material from the rotating drum in the drum material return line, and it can be led to the preliminary product mixer, 2.

The anaerobically pre-treated material from the anaerobe container, 19, which was not led back as a partial flow, can then be given to the crude composter, 23. Here, too, there exists the possibility to provide a crude compost material return by way of line 22. To accelerate the crude composting, the post-ventilator can blow air that has been pre-heated accordingly by way of the waste heat line, 14, into the crude compost. Viewed globally, what is at issue is a return of anaerobic material.

From the crude composter, the material is then led to a container for the purpose of post-denitrification, 24. For this purpose, it is recommended, in particular, that worm cultures, 25, be

used, because such worm cultures lead to an increased nitrate breakdown in the compost material.

Overall, thus, provision is made for denitrification by way of the pre-denitrification container, 5, by way of the topped anaerobe container 19, and by way of post-denitrification by means of suitable worm cultures.

In the topped anaerobe container, in particular, increased break-down of noxious substances can occur as a result of the sojourn time for which provision is made, a period between 2 and 30 days.

In addition, provision can be made that not all material be led by way of the topped anaerobe container 19, but only a partial flow.

At the outlet of this anaerobe container, by way of the enrichment line, 26, material that has already undergone increased breakdown of noxae can be mixed together with the initial material, and together with the latter, be given to the crude compost.

It has proven to be to good purpose that microbe-friendly prepared water be conducted to the throughput process ahead of or in the rotating drum, 6.

A water conditioning facility, 33, serves this purpose. This water conditioning facility can be connected to a water container, 30 - for example, the municipal water supply network, as well as with a mixing fluid container, 31. The fluids are conducted by way of valves that are not designated in any greater detail, to a pump, 32, which is, in turn, connected to the water conditioning facility, 33.

The ratio of fluids can be adjusted, according to the need of basic nutritive substances (N, O, P, S). The mixing fluid can, for example, be liquid manure, which contains high quantities of nitrates, or whey in proportions between zero % and 100%, particularly those substances with a great need (biological or chemical) for oxygen.

In any case, the mixing fluid exhibits a sufficiency of organic substances so that collateral fermentation occurs in the rotating drum, 6. In principle, it can also be to good purpose to conduct the freshly shredded material to a washer, 34, to clean it.

The water that is needed for this purpose can then be kept essentially free of sludge and suspended particulates in the washwater subsequent preparation unit, 35. As a matter of principle, it is, indeed, worth recommending that the sludge and the suspended particulates then be returned to the process once more. However, should it then prove that an inadmissible

enrichment of heavy metals is present here, then these sludges and suspended particulates must be disposed of separately. Fig. 2 shows details that pertain to the water conditioning facility, 33.

Such a water conditioning facility, 33, possesses a housing, 36, that is substantially a round cylinder. In a bottom segment of this housing, 36, entry bore holes, 37, are provided. The bore holes run at an inclination relative to the longitudinal axis of the cylindrical housing in such a manner that they come together, in convergent fashion in the direction of the entrance.

Downstream from the entry bore holes, 37, an electromagnetic coil, 38, in the form of a ring, is provided, which exhibits, at its center, a corresponding core, 39. The core, 39, is electromagnetically insulated with respect to the housing, 36. Consequently, an annular gap, 41, arises between the ring-shaped electromagnetic coil, 38, and the core, 39. The points of impingement, 43, at which the entering water jets converge by way of the entry bore holes, 37, lie in this annular gap, 41.

This will be addressed in detail later.

Downstream from the points of impingement, 43, the housing is continued into an outflow channel, 40. There, the electromagnetic core, 39, ends as well.

Now, on a prescribed circumference of the bottom segment, there sit several entry bore holes, 37. The entry bore holes, 37, are inclined toward each other in such a way that two entrance bore holes, in each case allow a pair of water jets to enter the annular gap, 41, which then meet at the point of impingement, 43. The point of impingement, 43, lies, as Fig. 3 shows, in particular, outside any and every contact area with the electromagnetic coil, 38, or with the core, 39. And yet, a strong electromagnetic field is present here. This is enhanced by the fact that the core, 39, has a polygonal cross-section that is twisted, preferably in the longitudinal direction. If one joins the midpoint of the core with a radial, unlimited line that passes through an angle of the polygon, the point of impingement, 43, lies on its extension as well. The polygonal embodiment of the core thus assures concentricity of lines of the magnetic field, so that the water jets that appear there are exposed to this high intensity of field as well.

Although the physical properties in this regard are not fully clarified with respect to the water conditioning, it can be assumed that as a result of the atomization of the water jets in the area of the high strengths of the magnetic field, a crushing, and at the same time, a homogenization of the crystalline structures that are found in the water occurs.

The crushing of the crystalline structures does not, purposely, eliminate them. The crystalline structures are, however, reduced considerably in terms of size, thus fostering the biochemical digestion of the compost material that is permeated with this water.

After a certain time, however, the finely-dispersed crystalline structures regroup to form large crystalline structures, so that in this way, conditioned water can then be released into the environment once more without further ado.

Furthermore, Fig. 4 shows an embodiment example of a mixing blade, 10.

A mixing blade of this type is rigidly joined to the mantle, 45, of the rotating drum, and it exhibits a mixing surface, 47 that points toward the interior area of the drum. At mixing blade 46, on the same side as its end, a mixing hook is provided which points, substantially, in the axial direction of the rotating drum, 6. Therefore, the mixing hook assures thorough mixing in the direction of the circumference of the rotating drum, while the rather long area of the mixing blade, 10, exhibits a mixing surface, 47, that points radially toward the interior of the rotating drum. The mixing surface, 47, causes an axial displacement of the material that is to be mixed thoroughly, whereby by way of the helically shaped undercut area, 49, of mixing surface, 47, a certain dug up effect results.

Furthermore, Fig. 5 shows an extension of the invention.

There, an area of the facility may be seen that serves to provide subsequent aerobic treatment of a pre-decayed partial flow, 55. The pre-decayed partial flow is branched off behind the rotating drum or any other kind of suitable preliminary decaying, and is led to this area of the facility as partial flow 55. This area of the facility is also designated a bio-stage reactor.

After a subsequent aerobic treatment in the subsequent treatment facility 56, the partial flow that has undergone this treatment, 70, is conducted back to the rotating drum.

The centerpiece of the subsequent aerobic treatment facility, 56, is the reactor vessel, 59. The reactor vessel, 59, has an inner vertical tube, 60, in which a downward flow, 63, of the partial flow, which is to be treated anaerobically, is produced.

For reasons of continuity, the downward flow, 63, outside the inner vertical tube, 60, is diverted to an upward flow, 64. The result, thus, is a basically closed loop of flow, 61, within the reactor vessel 59; by these means, deep-seated thorough mixing of the corresponding partial flow with air, or with a mixture of air and water, can be accomplished. The introduction of the mixture of air and water is accomplished in the inner vertical tube, 60, by means of an aerobic

jet, 62, that is arranged in the downward flow, 63. There, a flow of air is conducted to a flow of water made of prepared water that is, preferably, friendly to microbes.

As a result of the self-contained closed loop of flow, 61, a high throughput mass is achieved at a high degree of mixing efficiency. Therefore, even in the case of this embodiment variant, the integration of a partial composting process with the processing stages for microbial water preparation into a single, stationary throughput process has succeeded.

The integration is accomplished, among other things, by virtue of the fact that the air-water mix is led into the vertical downward flow 63 while an equally large volume flow can be taken from the vertical upward flow 64, to be led back into the rotating drum.

The partial flow that is removed and is to be led back can, initially, be led to a sedimentation tank, 65. In this case, it is recommended that this partial flow be subjected to a predetermined sojourn period, so that the micro-organisms can be separated from the excess sludge, 71, that is deposited. The flow of fluid that contains the microbes can then be led back to the revolving drum as partial flow 70 while the excess sludge 71 is removed and can be led, possibly, to subsequent processing. The partial flow, 70, can also, initially, be conducted to the preliminary product mixer, 2, and from there, to rotating drum, 6 (see Fig. 6). Furthermore, Fig. 5 shows an additional alternative, which is represented by a broken line of dashes. According to this, the partial flow that is provided for the subsequent aerobic treatment is separated in a microbe separator, 66, into solids, 67, and cloudy water that has been enriched with micro-organisms. Those microbes that are sought for the subsequent aerobic treatment are found in this cloudy water flow, 68.

The cloudy water, 68, that has been enriched with micro-organisms, can now be separated, once again, by way of filter, 69, into water and solids. The liquid phase is now prepared by way of an additional water conditioning facility, 33, in a manner that is friendly to microbes, and then mixed with air in the loop reactor, 59.

Furthermore, Fig. 5 shows that the cloudy water flow, 68, can be brought into a washer, 73, where, if necessary, it is thoroughly mixed together with the partial flow that is branched off behind the rotating drum 6, or with a partial flow from the preliminary decaying that is of equivalent value. A mixing blade, 74, that is arranged in washer, 73, serves this purpose.

The result is then led to a sedimentation tank, 72, in order to remove the solids from the float there. The solids can once again be led to the partial flow, 70. The float is then conducted

to the filter, 69. There, by way of a return line, 167, the thickened solids can be added to partial stream 70.

The water that is filtered out is then led to the water conditioning facility, 33, by way of the filtration water input line, 168, which is, in addition, struck by the recovered heat by way of thermal input line, 15.

By way of supplement in this regard, Fig. 6 illustrates the principle that has been applied thus far, supplemented, however by means of the facility parts I and II.

Facility part I corresponds, in principle, to the anaerobic post-denitrification, as already described in Fig. 1. Facility part I, however, is, in addition, provided for post-denitrification according to Fig. 1, in order to bring the coarse material from sieve 17 to a coarse rot. A return of the sieve residue from sieve 17 to grinder 18 is therefore not needed in this case. What was said according to Fig. 1 regarding all individual structural groups also applies to the parts of the facility according to Fig. 6, I.

In particular, it must still be noted that solids that were left behind in fine sieve 17, by contrast to the line leading back to the grinder 18 according to Fig. 1 - are now led directly to the anaerobe container 19. Therefore, in the portion of the facility according to Fig. 6, I, residual nitrate elimination occurs in the coarse components of the fraction that were filtered out by fine sieve 17, whereas the fine components of the fraction are processed in an identical facility according to Fig. 1. The initial materials on both sides can then, after leaving the facility, be conducted to further use.

Furthermore, Fig. 6 shows, in addition, that in the upper left portion of the picture, the facility's intake is separated into a line, 130, for the input of biologically degradable residual refuse, as well as a line, 130a, for the input of fresh water/utility water. This is mixed with shredded material in a washer, and, if necessary, given up to subsequent water preparation, 35. In each case, partial flows can be taken from the washer, 34, and subsequent water preparation 35, to be led at that time to the preliminary product mixer in the suitable mixture ratio.

This mass flow can, furthermore, still be brought together with a pre-determined proportion of fluid that undergoes biodegradation with difficulty, which is conducted via the line 130b. Mixing fluid containers, 31, whose outlets are then connected to the shared intake line to the preliminary product mixer 2, serve this purpose.

If it should turn out that the flow that is removed from rotating drum 6 requires additional denitrification, it is recommended that a partial flow be taken from behind the grinder, 18, and that it be conducted directly to anaerobic denitrification in the denitrification container 5. This measure makes sense, particularly if renewed thorough mixing of this material with the shredded material, without further denitrification, is to be avoided.

As Fig. 6 also shows, the heat exchanger 13 can be supplied with fresh air via line 130c, without further ado.

Facility part II, according to Fig. 6, shows an additional water preparation. To this end, the partial flow, 55, which is branched off behind the rotating drum, is given over, initially, to a washer, 34, and then to subsequent water preparation, 35, before the partial flow, which is prepared in this way, is then led to the filter 69 in accordance with the representation according to Fig. 5. In this case, as well, a fresh water/utility water flow is led from line 130a to partial flow 55 in the washer 34 before the microbes contained in partial flow 55 can be released by way of the water intake. The resultant solids can then be led back once more to a processing stage ahead of the rotating drum, or be led directly to the rotating drum via the return line 70.

By way of supplementation, it should be said that behind the loop reactor 59, a sedimentation tank, 65, can be provided, the solids of which are also given up to the return line, 70, while the float is led back via the line to the excess water return of the water conditioning facility 33 ahead of the rotating drum.

Figs. 7a, b show additional embodiments of a mixing drum.

Whereas, in the embodiment examples according to Figs. 1 and 6, the mixing drum is seated on bearings so as to be capable of rotation around a horizontal axis, and it has mixing blades, 10 that sit rigidly on its interior wall, by way of deviation from this, Fig. 6a shows that the mixing drum is seated on bearings so as to be stationary. The mixing drum is thus to be regarded as a tank container or something of that sort, in the interior of which preliminary decaying is to occur; this can occur under the additional input of air. The thorough mixing inside the mixing drum is, to be sure, of critical significance to the invention. The thorough mixing is accomplished by means of a circulating conveyor which rolls the material that is to undergo preliminary decaying within the stationary mixing drum continuously, in at least a quasi stationary fashion.

By way of deviation from this, Fig. 7b shows a mixing drum that is also stationary. A mixer, which moves continuously, discontinuously, or in quasi stationary fashion, is arranged within the mixing drum in order to keep the material that is to undergo preliminary decaying in as homogenous a thoroughly mixed state as possible.

Furthermore, Fig. 8 shows yet a further embodiment example of a facility for conditioning water. In principle, what happens here, as well, is that a jet of water is led, in an atomized state, to an electromagnetic field, and is brought together again downstream.

The crucial difference in the case of the facility according to Fig. 8 resides in the fact that the atomization of the water jet, which enters via entry bore hole 37 occurs at a perforated impact plate, 180. The impact plate, 180, has holes, 185, that lie in the extension of entry bore hole 37, which penetrate the impact plate 180 and debouch, in the form of a ring, in the area of the electromagnetic field, in the annular gap, 41, that is there.

The incoming water is shot through the holes 185 and is atomized as it exits the holes. The atomized water is then subjected to the influence of the magnetic field and, downstream, it can, if necessary, be driven through an additional impact plate, 190, before it is collected once more in the outflow channel, 40.

In conclusion, it should be pointed out once more that as a result of the relatively high temperatures that are sought after in the mixing drum, thermal insulation is provided for the mixing drum, which surrounds the mixing drum as an insulating mantle.

List of Reference Symbols

- 1 Shredder
- 2 Preliminary product mixer
- 3 Mixing shaft
- 4 Mixing blade(s)
- 5 Anaerobic denitrification container
- 6 Mixing drum
- 7 Bearings
- 8 Input end
- 9 Removal end
- 10 Mixing blades, mixing device, mixer, circulating conveyor
- 11 Return conveyor
- 12 Return conveyor spiral screw
- 13 Heat exchanger
- 14 Waste heat line
- 15 Thermal return line
- 16 Coarse sieve
- 17 Fine sieve
- 18 Grinder
- 19 Anaerobe container
- 20 Drum material return line
- 21 Anaerobe material return line
- 22 Crude compost material return line
- 23 Crude composter
- 24 Post-denitrification
- 25 Humus wormer, worm culture
- 26 Enrichment line
- 27 Post-ventilator
- 28 Preliminary ventilator

- 29 Preliminary denitrification line
- 30 Water container
- 31 Mixing fluid container(s)
- 32 Pump
- 33 Water conditioning facility
- 34 Washer(s)
- 35 Subsequent washwater preparation
- 36 Housing
- 37 Entry bore hole
- 38 Electromagnetic coil
- 39 Core
- 40 Outflow channel
- 41 Annular gap
- 43 [sic] Point(s) of impingement
- 44 Radial jet
- 46 [sic] Mixing blade(s)
- 47 Mixing surface
- 48 Mixing hook
- 49 Undercut
- 50 Grinder return line
- 51 Air song nipple [sic] Air suction nipple⁴
- 55 [sic] Partial flow branched off behind the rotating drum
- 56 Aerobic subsequent treatment facility
- 57 Air intake
- 58 Water intake
- 59 Reactor vessel
- 60 Inner vertical tube
- 61 Loop of flow

⁴Translator's Note: A typographical error in German involving typing "n" instead of "u" would yield this result. It is likely that such an error was made.

62 Aerobic jet
63 Downward flow
64 Upward flow
65 Sedimentation tank
66 Microbe separator(s)
67 Flow of solids
68 Cloudy water flow
69 Filter(s)
70 Partial flow that is led back to the rotating drum
71 Excess sludge
72 Sedimentation tank
73 Washer(s)
74 Mixing blade(s)
130 Residual biodegradable refuse
130a Fresh water/utility water
130b Fluid that undergoes biodegradation with difficulty
130c Fresh air
130d Waste air
167 Return line for thickened solids
168 Filtration water input line
170 Excess water return line
180 Impact plate
185 Hole
190 Impact plate

Patent Claims

1. A process for rotting compostable material in a quasi-stationary continuous process, with previous shredding and input of the shredded material into a mixing drum to undergo preliminary rotting under an elevated temperature and subsequent transport, for the purpose of rotting on ricks, characterized by the fact that during the passage through the process and behind predetermined process stages after the process stage "mixing drum," partial flows containing microbes are branched off from the flow of material, and, ahead of predetermined process stages that lie either toward the back of the process, ahead of, or at the beginning of the mixing drum, they are added once more to the flow of material there, which also contains microbes.
2. A process according to claim 1, characterized by the fact that behind the processing stage "mixing drum," a partial flow is branched off and conducted to the anterior end of the mixing drum.
3. A process according to claim 2, characterized by the fact that returning occurs within the mixing drum.
4. A process according to claim 2 or claim 3, characterized by the fact that the partial flow that is branched off behind the processing stage "mixing drum" is subjected, at least in part, to a subsequent anaerobic treatment (56) before this partial flow (55) is led back to the anterior end of the mixing drum (6) or to a processing stage before the mixing drum.
5. A process according to claim 4, characterized by the fact that, to provide a subsequent aerobic treatment, air, or a mixture of air and water, is led to the partial flow (55), during continuous thorough mixing in a reactor vessel in which the partial flow (55) and the air, or the mixture of air and water, respectively, are led in the form of a loop of flow that is enclosed within itself.
6. A process according to claim 5, characterized by the fact that the loop of flow (61) constitutes vertical downward flow (63) and vertical upward flow (64).
7. A process according to claim 6, characterized by the fact that the air and water mix is led to the vertical wastewater flow (63), and that the partial stream (70) that is to be led back to the mixing drum is taken from the vertical upward flow (64).

8. A process according to one of the claims 4 through 7, characterized by the fact that the partial flow (55), prior to subsequent aerobic treatment, is separated into a flow of solids (67) and a flow of cloudy water (68) such that preferably only the flow of cloudy water (68) is subjected to the subsequent aerobic treatment.

9. A process according to one of the claims 4 through 8, characterized by the fact that after the subsequent aerobic treatment, the partial flow (70) that is to be led back to the mixing drum is subjected to a period of sojourn in a sedimentation tank (65) such that the particles of solids that are present can settle as excess sludge (71).

10. A process according to one of the claims 1 through 9, characterized by the fact that a preliminary aerobic and/or anaerobic treatment takes place between the shredder and the mixing drum.

11. A process according to claim 10, characterized by the fact that a partial flow is branched off behind the rotating drum, and led back again before the processing stage of the aerobic and/or anaerobic pre-treatment.

12. A process according to claim 10 or 11, characterized by the fact that aerobic and/or anaerobic preliminary products are led to the aerobic and/or anaerobic pre-treatment, and that a continuous thorough mixture of the aerobic or anaerobic preliminary products occurs with the shredded material.

13. A process according to one of the claims 1 through 12, characterized by the fact that a thorough sifting occurs behind the mixing drum and that the material that is retained by the sieve is finely ground and led to the throughput process in front of the mixing drum.

14. A process according to claim 13, characterized by the fact that the finely ground material in front of the mixing drum experiences aerobic or anaerobic pre-treatment.

15. A process according to one of the claims 1 through 14, characterized by the fact that behind the mixing drum, heat is extracted from the material to be composted, and that the heat is led back to the process again ahead of the mixing drum.

16. A process according to one of the claims 1 through 15, characterized by the fact that water that has been prepared in a way that is friendly to microbes is conducted to the throughput process ahead of and/or in the mixing drum (8), and/or in the subsequent aerobic treatment (56).

17. A process according to claim 16, characterized by the fact that a water jet is conducted to an electromagnetic field in an atomized state, and that downstream, the atomized water jet is brought together again.

18. A process according to claim 17, characterized by the fact that the atomization occurs in a manner involving no mechanical contact, and only as a result of collision with another jet of water.

19. A process according to claim 18, characterized by the fact that the jets of water are aimed at the point of collision at an acute angle.

20. A process according to claim 17, characterized by the fact that the atomization occurs in a perforated impact plate (180), the holes of which pass through the impact plate 180 and end in the area of the electromagnetic field.

21. A process according to claim 16, characterized by the fact that admixture fluid, which also undergoes fermentation, is added to the water.

22. A process according to one of the claims 1 through 21, characterized by the fact that behind the mixing drum, preferably after prior sifting, an intermediate storage period of about three to thirty days occurs, substantially under hermetic seal.

23. A process according to one of the claims 1 through 22, characterized by the fact that the shredded material is led through a washing facility ahead of the mixing drum.

24. A process according to claim 23, characterized by the fact that the suspended particles are separated from the water in a topped water preparation apparatus, and they are either led to the process or disposed of separately.

25. A process according to claim 1 - 24, characterized by the fact that the branched off partial flows, with the exception of the partial flow that is led back from the posterior end to the anterior end of the mixing drum, are led once more to a pre-determined flow of material behind the "shredding" processing stage, but ahead of the "mixing drum" processing stage.

26. A process according to claim 1 - 25, characterized by the fact that a partial flow of shredded and thoroughly mixed material is led to the "mixing drum" processing stage after preliminary denitrification has occurred.

27. A process according to claim 1 - 26, characterized by the fact that the mixing drum is stationary and that the thorough mixing is accomplished by means of circulating conveyance.

28. A process according to claim 1 - 26, characterized by the fact that the mixing drum is stationary and that the thorough mixing is accomplished by means of a mixer that is moved relative to the mixing drum.


29. A process according to claim 1 - 26, characterized by the fact that the mixing drum may be rotated around an axis with a horizontal component and that the thorough mixing is accomplished by means of mixing blades that sit rigidly on the mixing drum.

09/142712

WO 97/33845

PCT/EP97/01254

1/7

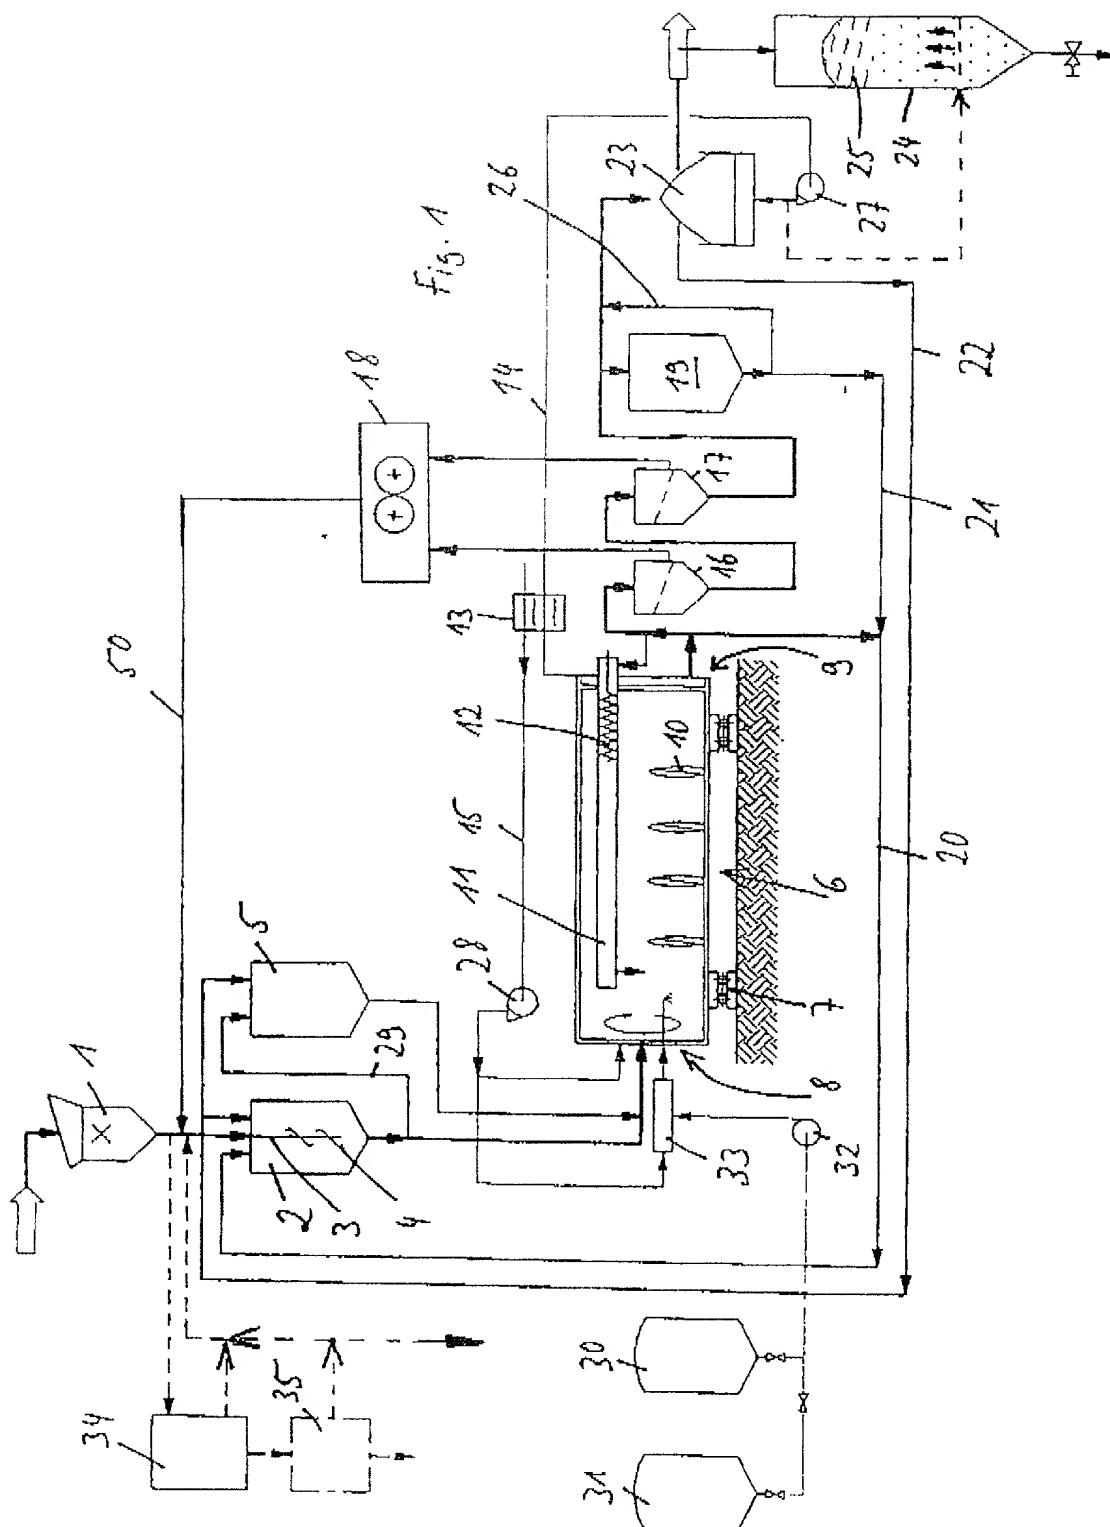

ERSATZBLATT (REGEL 26)

WO 97/33845

PCT/EP97/01254

2/7

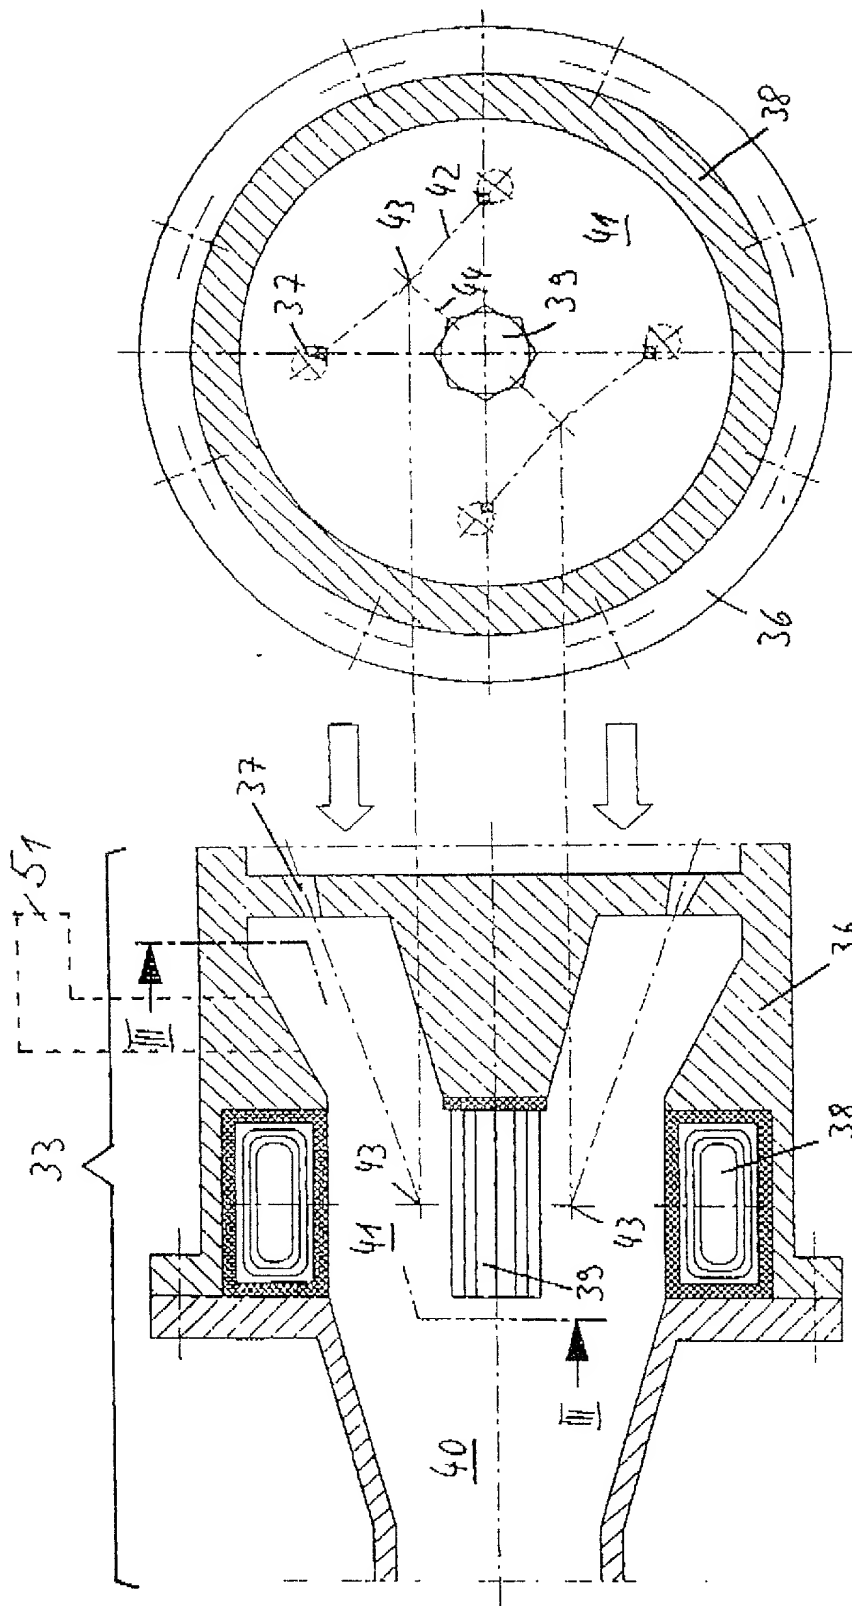


Fig. 3


Fig. 2

09/142712

WO 97/33845

PCT/EP97/01254


3/7

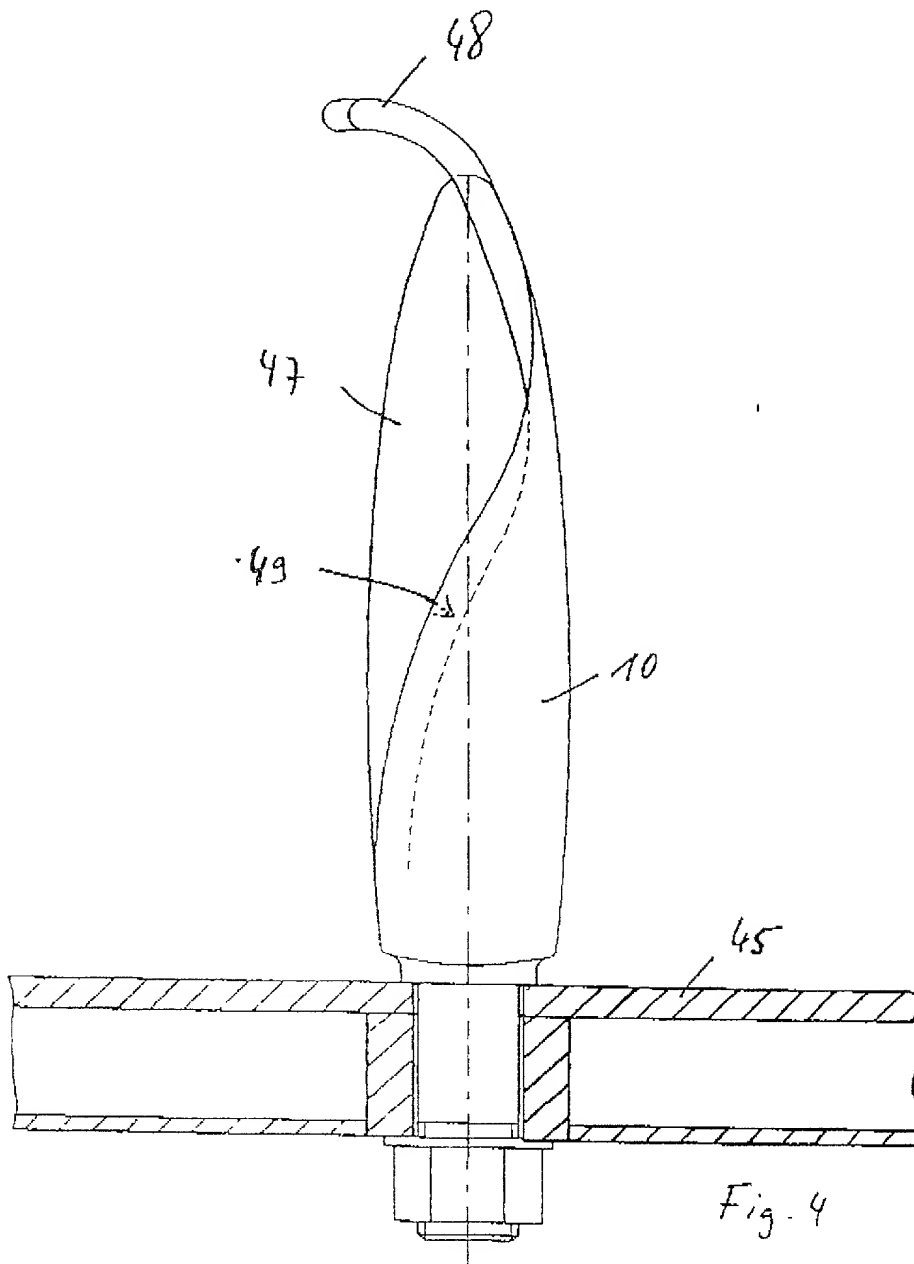

ERSATZBLATT (REGEL 26)

WO 97/33845

PCT/EP97/01254

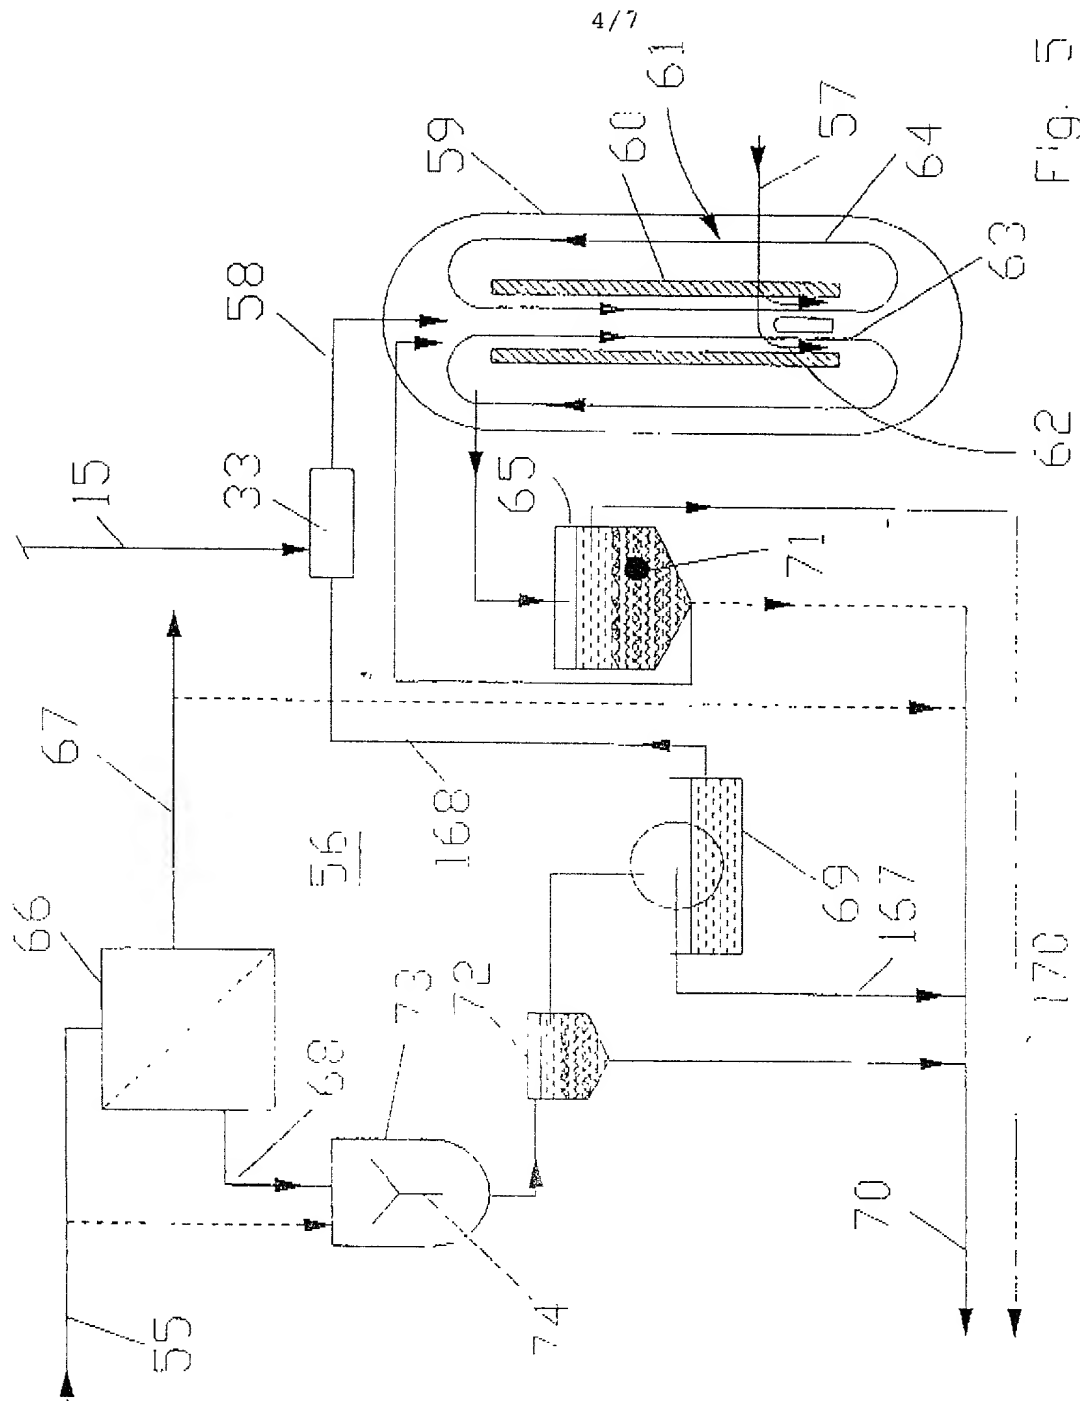


ERSATZBLATT (REGEL 26)

09/142712

WO 97/33845

PCT/EP97/01254

5/7

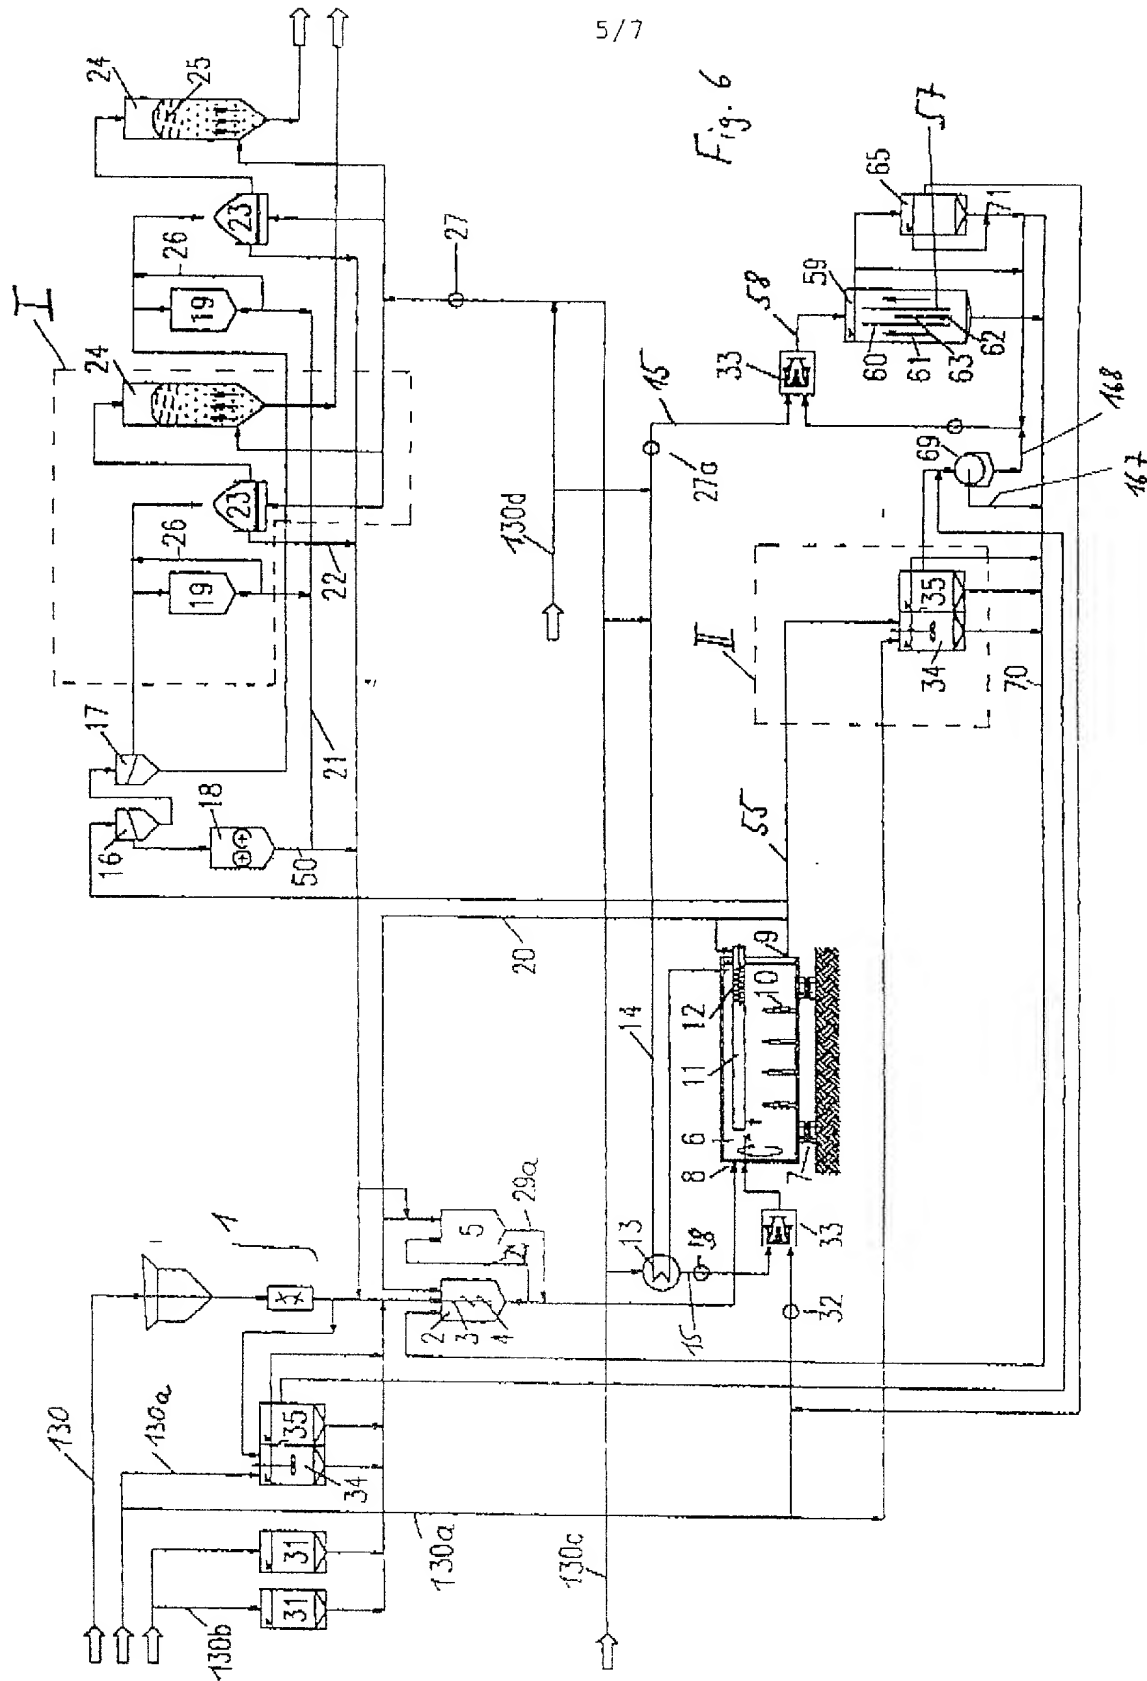

ERSATZBLATT (REGEL 26)

09/142712

WO 97/33845

PCT/EP97/01254

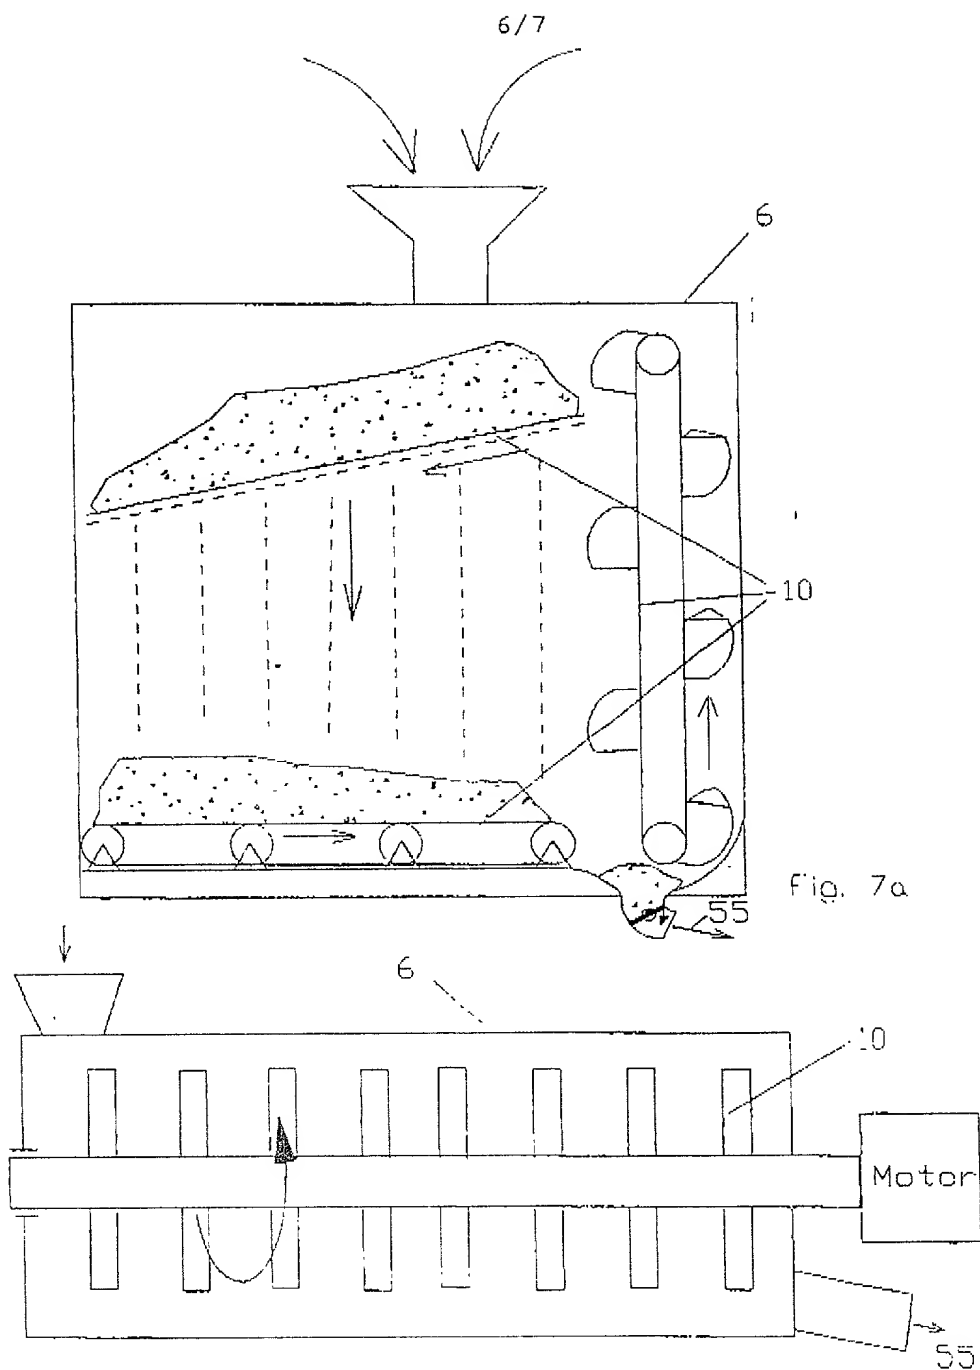



Fig. 7a

Fig. 7b

WO 97/33845

PCT/EP97/01254

7/7

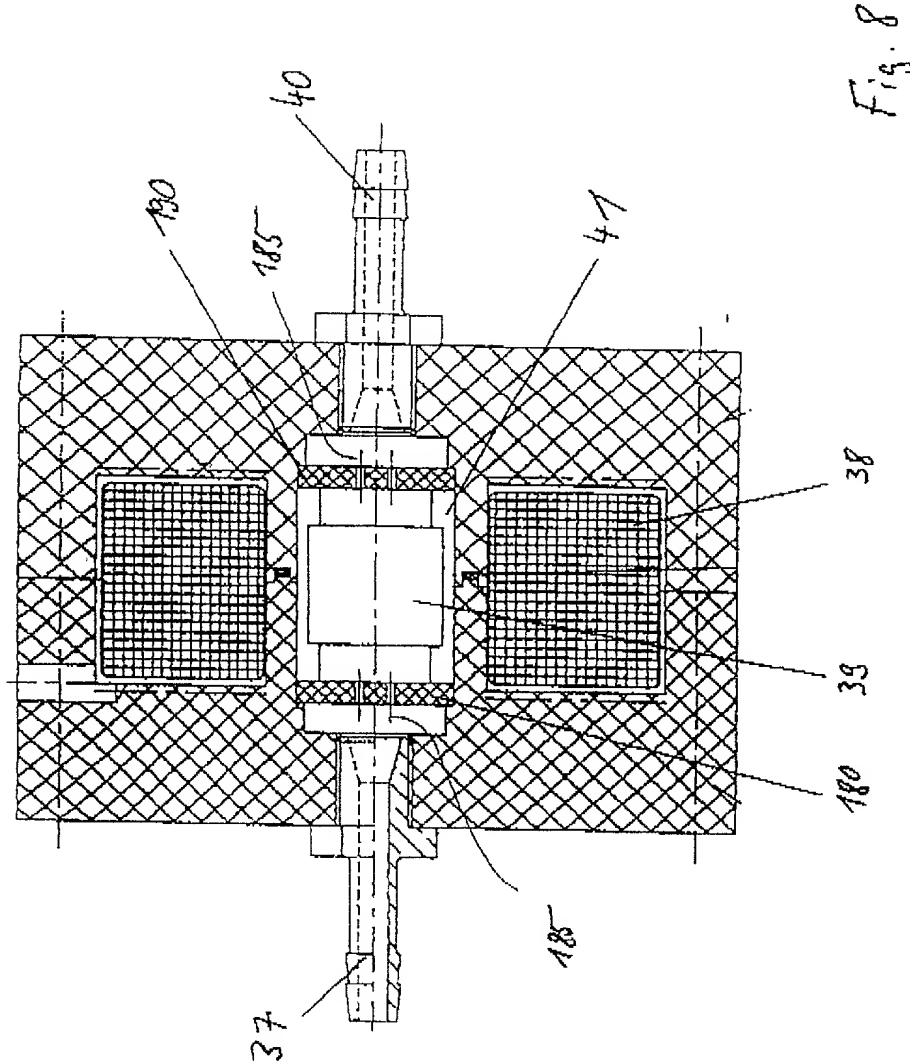

OCT-FAX *

30-Jul-1999 7:41

Heinz Loosen & Langenfeld

+49 212 6500304

S 1

DECLARATION AND POWER OF ATTORNEY

As below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I declare I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled "METHOD OF ROTTING COMPOSTABLE MATERIAL", the specification of which was filed on September 10, 1988, has been accorded United States Serial No. 00/407,122 and is identified by Attorney's Docket No. STUR-11.

I have read and fully understood and understand the contents of the above-identified specification, including the claims.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119, of International Application No. PCT/EP87/01254, filed March 12, 1987 and German Application No. 196 09 560.3, filed March 12, 1996 in Germany.

4 I hereby appoint Pandisolo & Pandisolo, a firm composed of Nicholas A. Pandisolo, Registration No. 17283, Mark J. Pandisolo, Registration No. 30663, Scott R. Foster, Registration No. 20570, and William A. Bonk, III, Registration No. 40521, or any of them, of 100 Totten Pond Road, Waltham, Massachusetts 02451, (Telephone No.

STUR-11

+ OCT-FAX +

30-Jul-1999 7:42

Heinz Loosen * Langenfeld

+49 212 6500304

S. 2

- 2 -

781-290-0030), my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and in like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Inventor's Signature Heinz LoosenInventor's Name Heinz LoosenDate: 14.7.1999Residence: Verbindungsstrasse 15, D-40764 Langenfeld, GermanyPost Office Address: sameCitizenship: German

DEX

E. 10. 1. 2

D. 10. 1. 2

STUR-21